


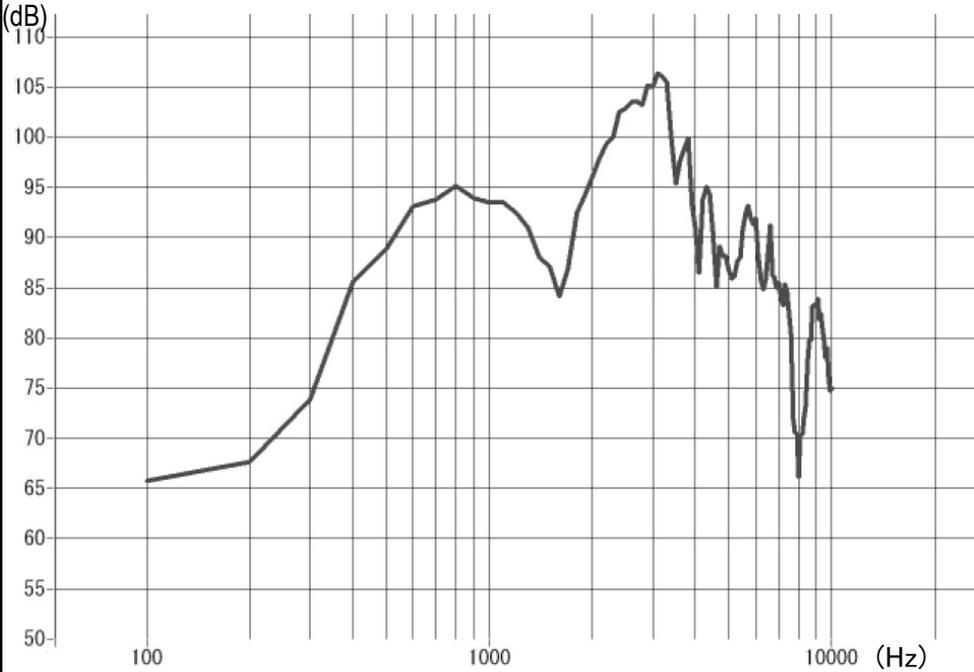


SPECIFICATIONS


[General Specifications]

Model	SPB-5E		
Input Power	5W		
Impedance	8Ω±15%		
Sound Pressure Level	90dB/W at 1m (400Hz, 500Hz, 600Hz, 800Hz)		
	※The sound pressure level may be lowered depending on the sound and environment of usage.		
Environmental Condition	Fit the product on the plate of □300mm, and measure the level.		
Operating Ambient Temperature	-20°C to +50°C		
Operating Ambient Humidity	Less than 85 % RH (No condensation)		
Storage Ambient Temperature	-30°C to +60°C		
Storage Ambient Humidity	Less than 85 % RH (No condensation)		
Mounting Location	Indoors : Upright, Inverted and Sideways Outdoors : Upright		
Mounting Direction	Upright	Sideways	Inverted
			
Protection Rating	IP54 (IEC 60529 Upright only)		
Vibration Resistance	45m/s ² (IEC 60068-2-6)		
Mass (Tolerance ±10%)	290g		
Standard Response Curve	<p>【Reference】(1W / 1m)</p> 		
Remarks	There are no contents of controlled substances exceeding the threshold for the RoHS Mounting Options : BK-001 / BK-002		


SPB-5E-W18A -1_2

PATLITE Corporation

Dimensions

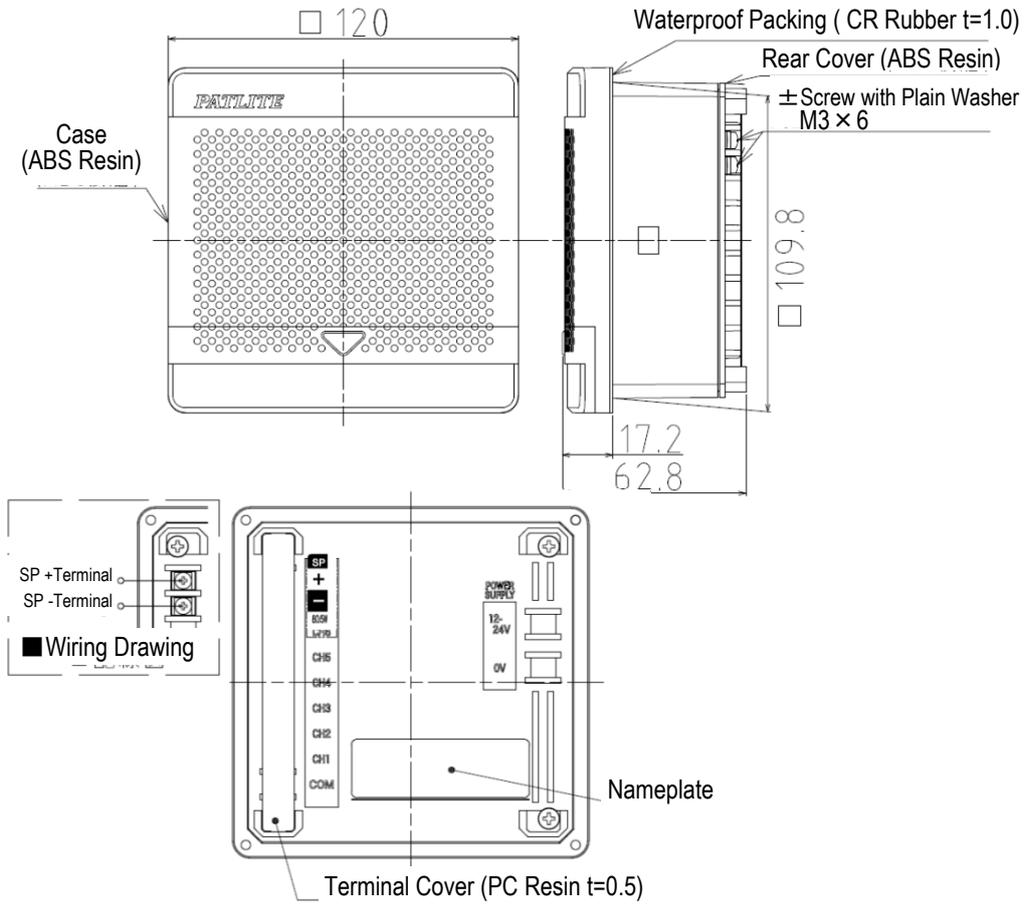

How to install

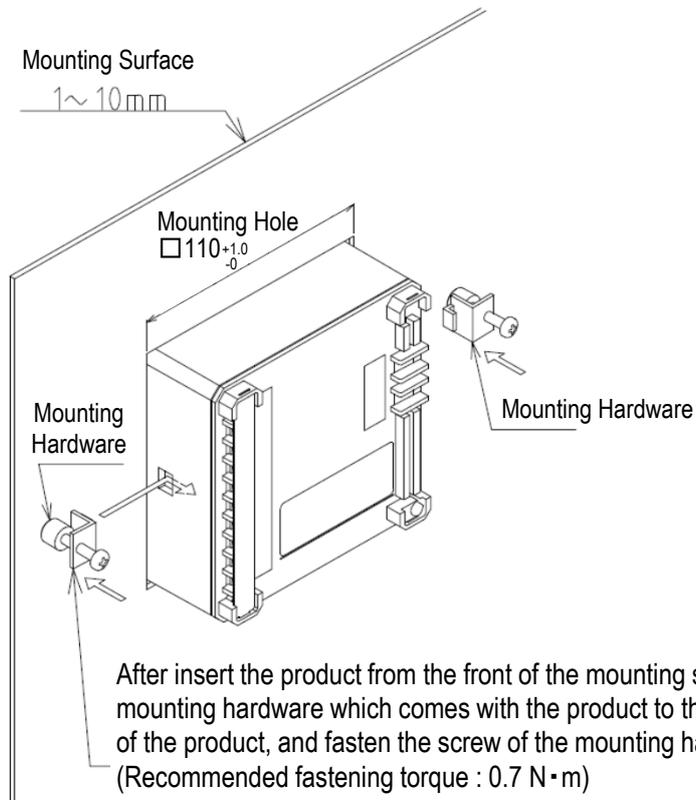

SPB-5E-W18A -2_2

PATLITE Corporation